



**GLASS SHOWCASE  
DISPLAY CABINET**

ITEM # DDKIT5  
INCLUDES 5 CARTONS (A-E)

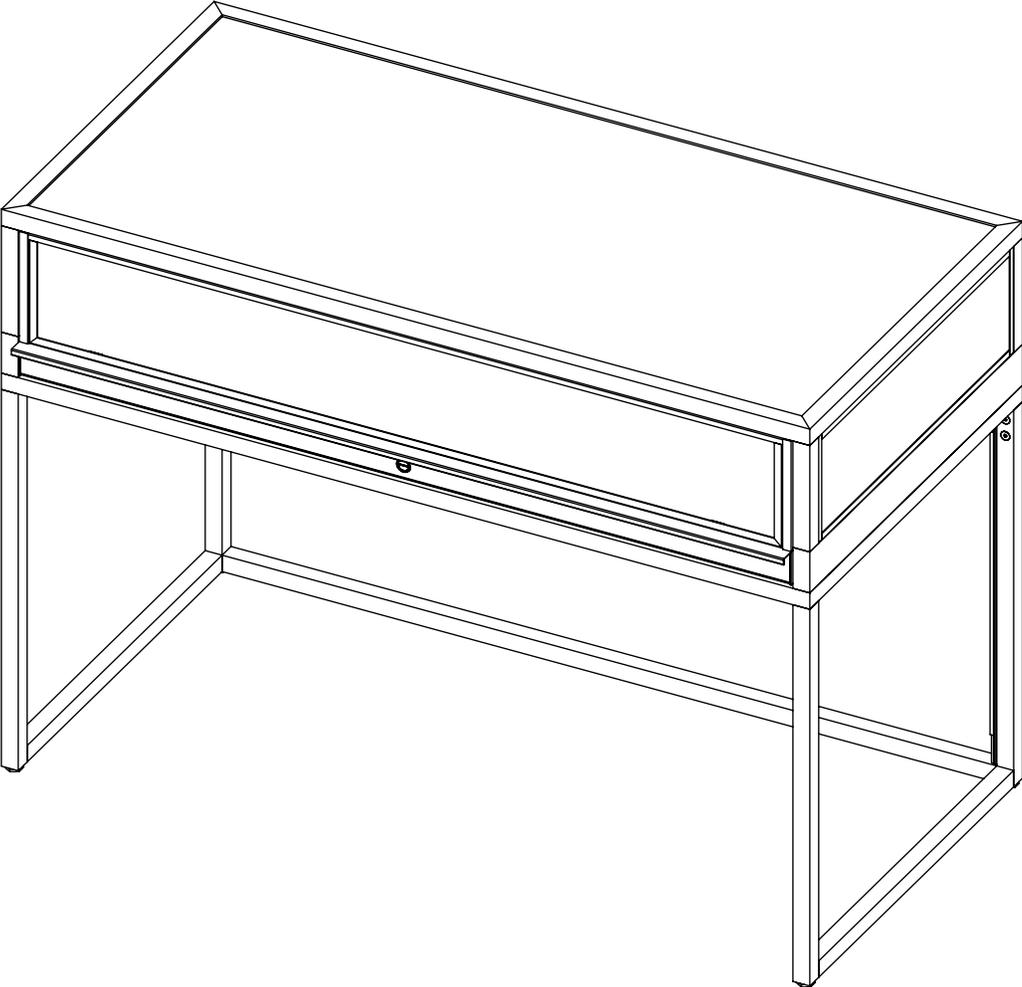



**2 PEOPLE  
REQUIRED  
FOR  
ASSEMBLY**

## GLASS SHOWCASE


NOTE: SHIPPED UNASSEMBLED

3 CARTONS:


1. (5) GLASS PIECES (CARTON B)
2. BOTTOM FRAME (CARTON C)  
(INCLUDES FRAME PIECES, POWER  
SUPPLY MOUNTING BRACKET)
3. TOP FRAME WITH LIGHTING (CARTON D)

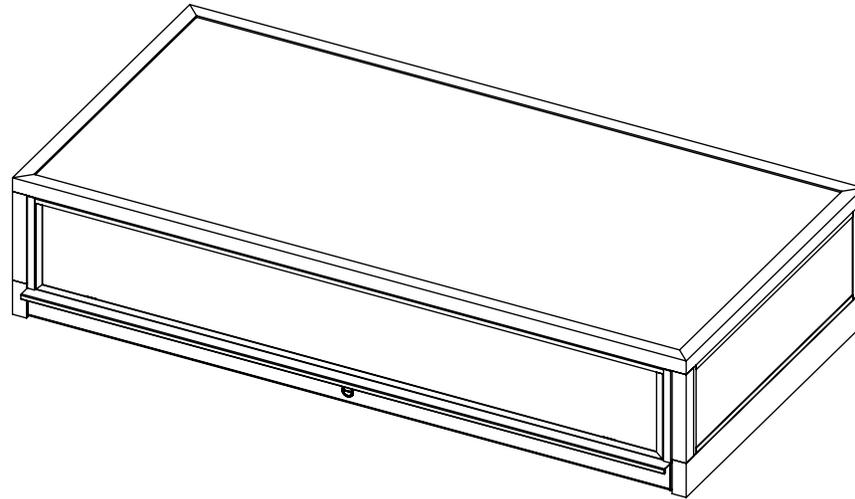

**4X**  
1/4-20 X 0.875" L  
CSK SOCKET HEAD  
SCREWS



**19X**  
1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS  
(4) TO SECURE REAR UPRIGHTS  
(4) TO SECURE FRONT FRAME  
(4) TO SECURE TO WOOD TOP  
(3) TO SECURE MDF INSIDE SHOWCASE  
(4) TO SECURE POWER SUPPLY  
MOUNTING BRACKET

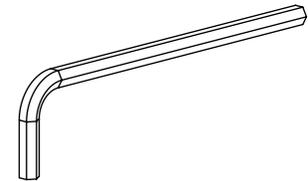

**2X**  
(1) FOR LARGER SCREWS  
(1) FOR SMALLER SCREWS





**2X**  
#8-32 X 0.315" L  
SOCKET BUTTON  
HEAD SCREWS


**FRAME**

CARTON A


- FRAME PIECES
- HARDWARE
- CABLE RACEWAY

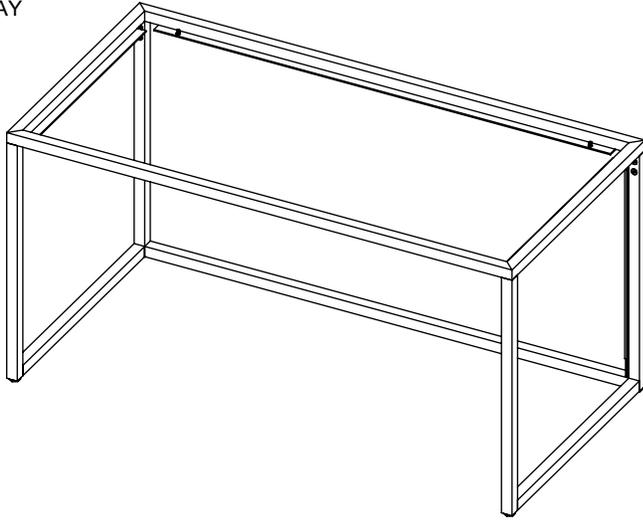

**12X**  
1/4-20 X 0.875" L  
CSK SOCKET HEAD SCREWS




**4X**  
1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS  
(TO SECURE TO SHOWCASE)



**1X**  
ALLEN KEY


**WOOD TOP**

CARTON E

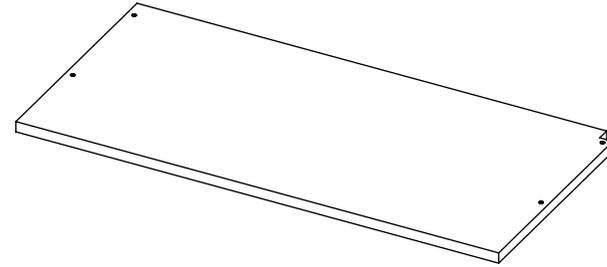


**1**

MOUNT THE CROSSBAR TO THE LEGS.




**4X**  
1/4-20 X 0.875" L  
CSK SOCKET HEAD SCREWS

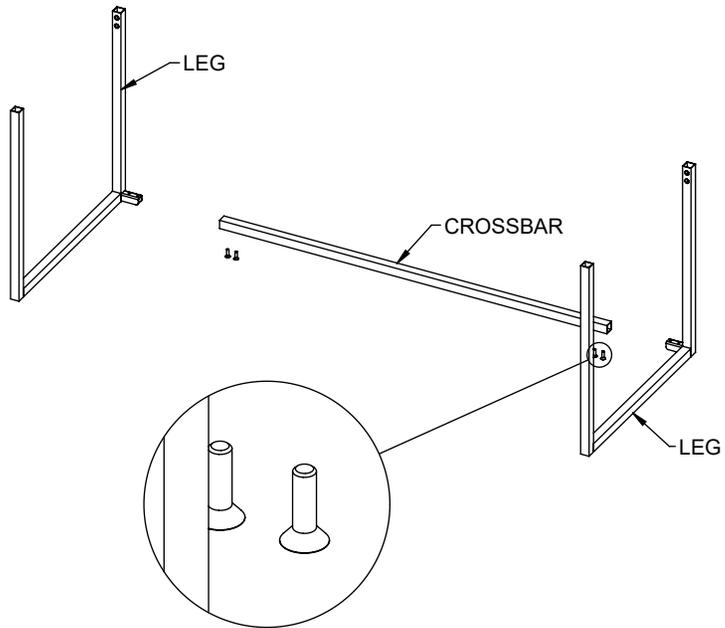


**2**

MOUNT THE TOP FRAME TO THE LEGS.




**8X**  
1/4-20 X 0.875" L  
CSK SOCKET HEAD SCREWS

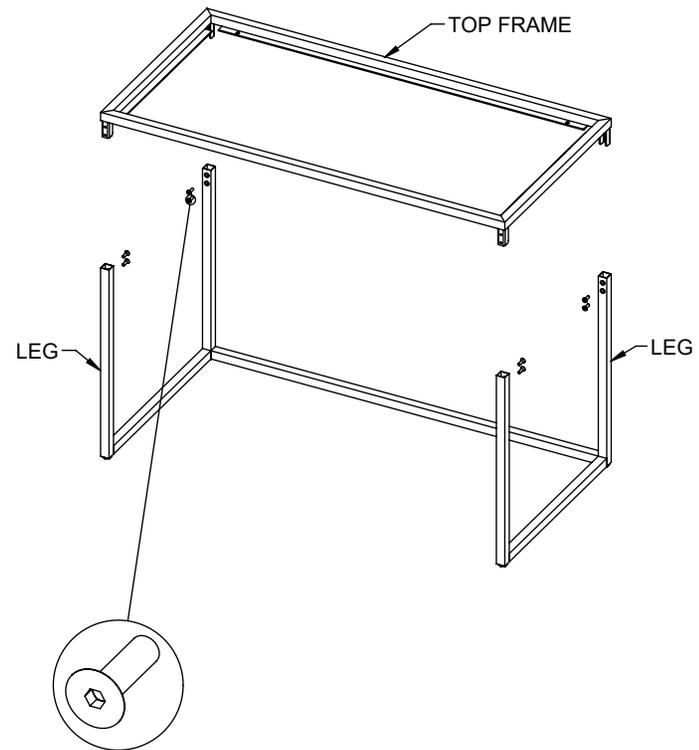


**3**

MOUNT WOOD TOP TO METAL FRAME.  
SCREW FROM UNDERNEATH.



**4X**


1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS

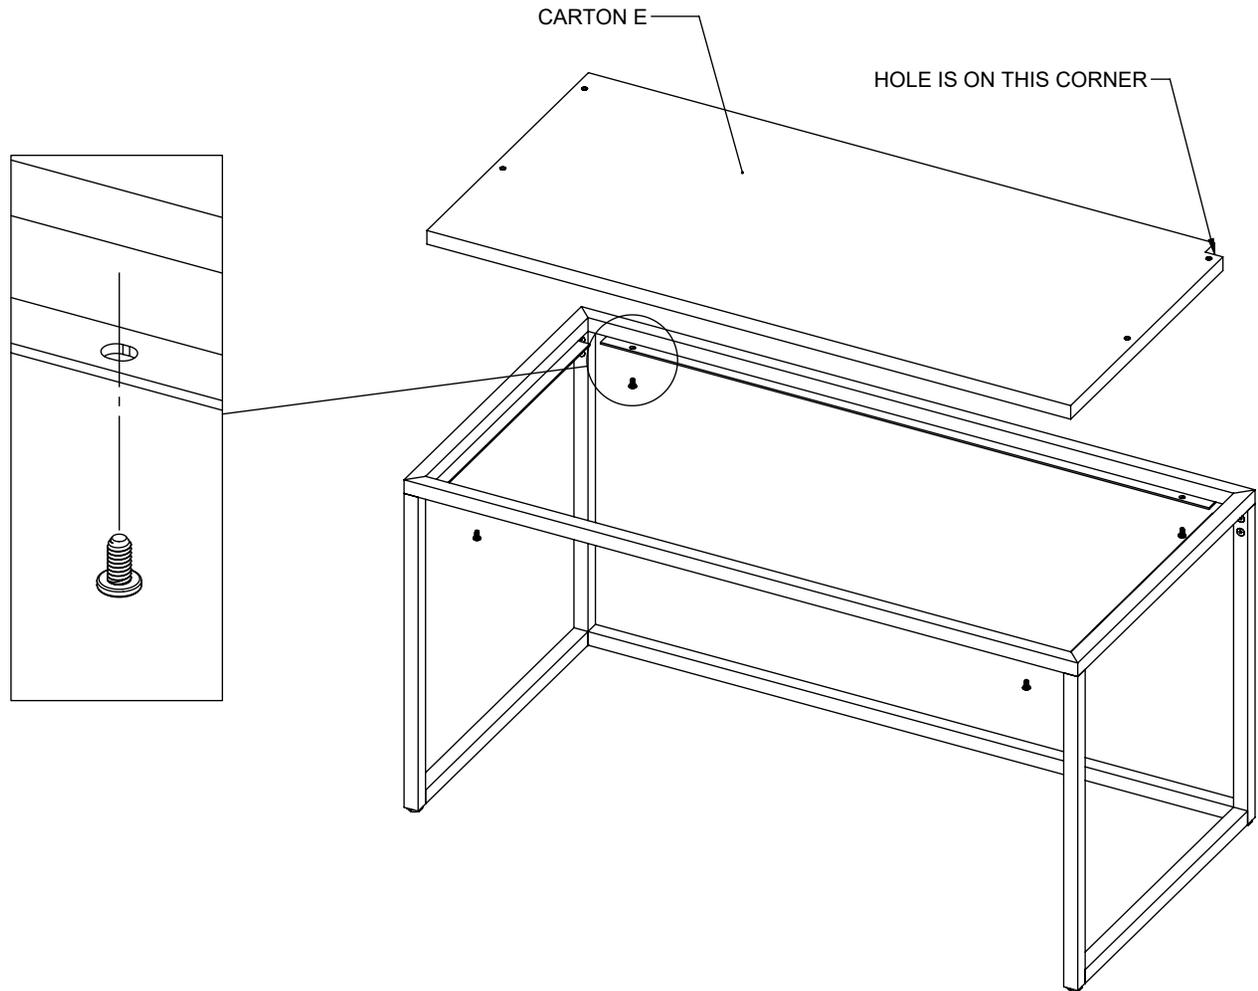



# 4

MOUNT BASE FRAME TO WOOD TOP.



SLIDE THE DRAWER GLIDES TO THE FRONT TO ACCESS L CHANNELS ON THE BASE FRAME.



**4X**  
1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS

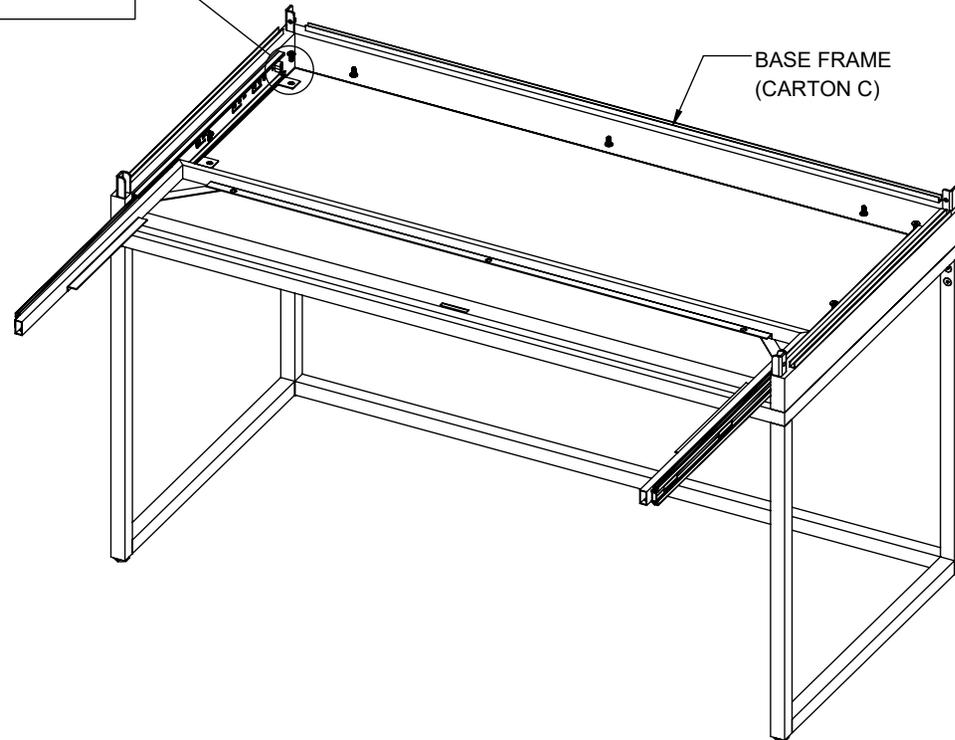

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	DDSWCASE10-1	BASE FRAME	1
2	DDSWCASE10-2	TOP FRAME	1
3	DDSWCASE10-2-GLASS	TOP GLASS PANEL	1
4	DDSWCASE-3	FRONT UPRIGHT	2
5	DDSWCASE-4	REAR UPRIGHT	2
6	DDSWCASE10-5-GLASS	SIDE GLASS PANEL	2
7	DDSWCASE10-6-GLASS	REAR GLASS PANEL	1
8	DDSWCASE10-7	FRONT FRAME	1
9	DDSWCASE10-7-GLASS	FRONT GLASS PANEL	1
10	DDSWCASE10-7-GLASS-TOPCHANNEL	TOP CHANNEL	1
11	ELECTRICAL COVER	ELECTRICAL COVER	2

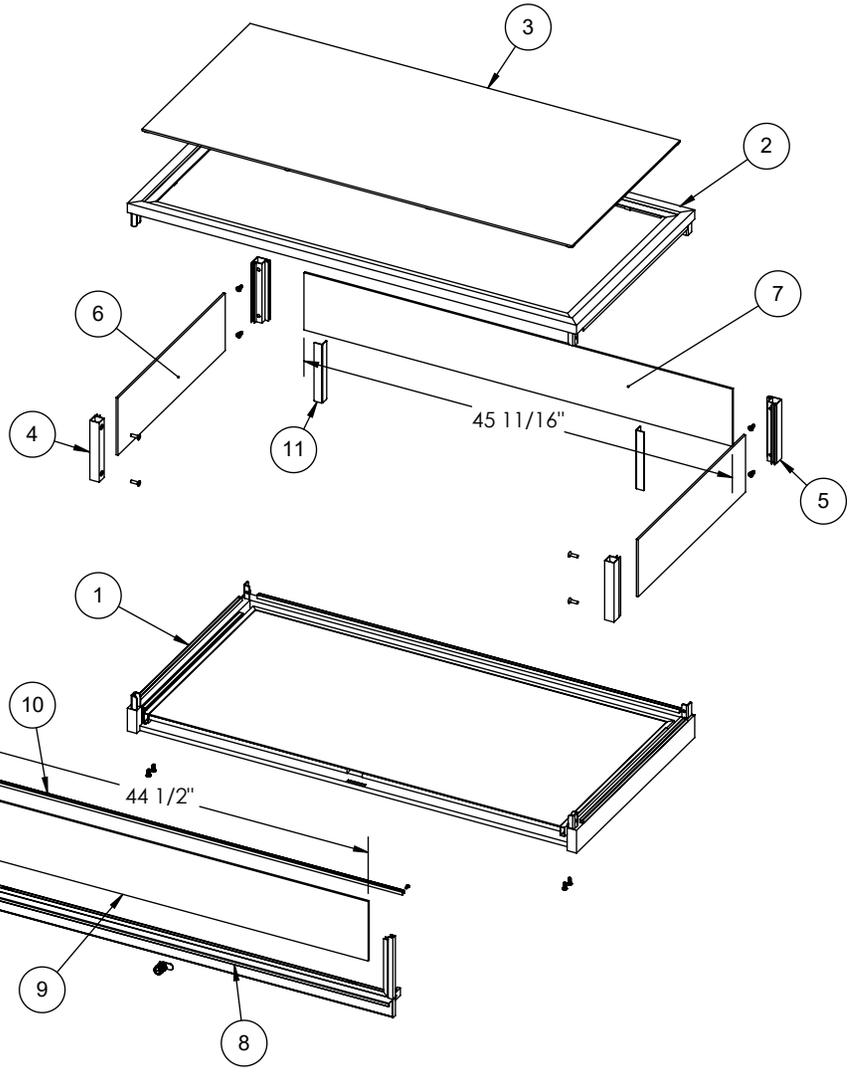


POWER SUPPLY MOUNTING BRACKET

# 5

MOUNT FRONT UPRIGHTS TO BASE FRAME.

MOUNT REAR UPRIGHTS TO BASE FRAME.

MAKE SURE REAR UPRIGHTS FACE CORRECT DIRECTION. THE U CHANNELS WILL FACE EACH OTHER. ON THE REAR UPRIGHTS, THE HOLES WILL FACE THE FRONT.

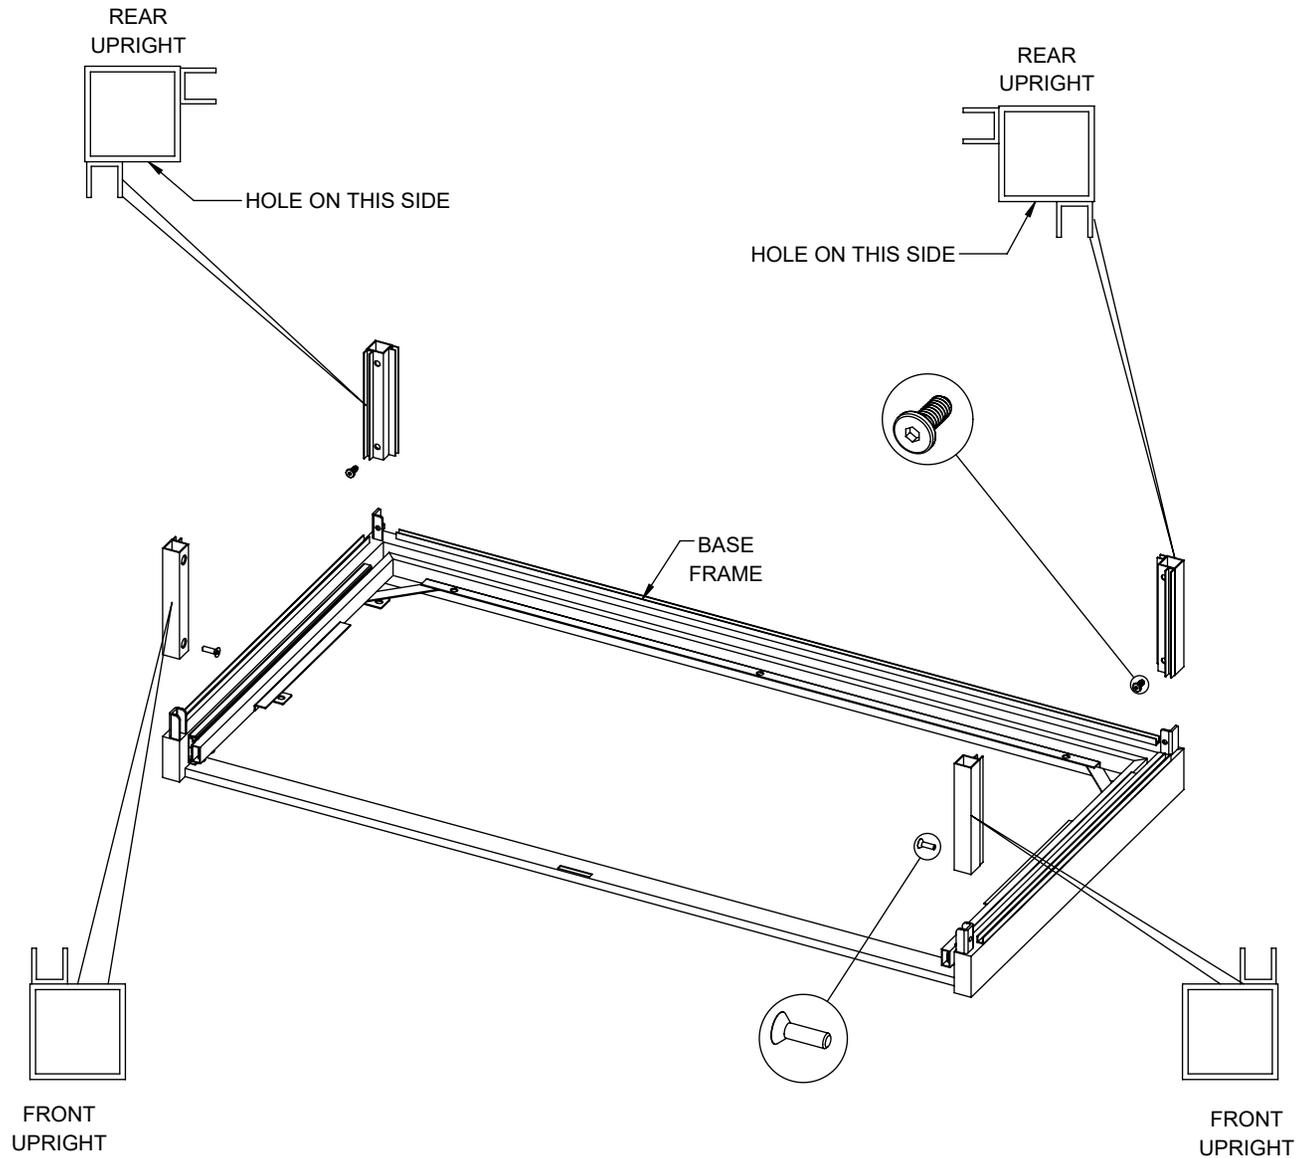

## 2X

1/4-20 X 0.875" L  
SOCKET HEAD FLAT HEAD SCREWS  
(TO SECURE FRONT UPRIGHTS)

## 2X


1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS  
(TO SECURE REAR UPRIGHTS)

## 6A

ON THE DRAWER FRONT, CHECK THAT THE FLAT NUT (ON LOCK) IS TIGHT.

IF FLAT NUT IS LOOSE, TIGHTEN WITH A WRENCH.


IF SCREW IS LOOSE, TIGHTEN WITH SCREWDRIVER.

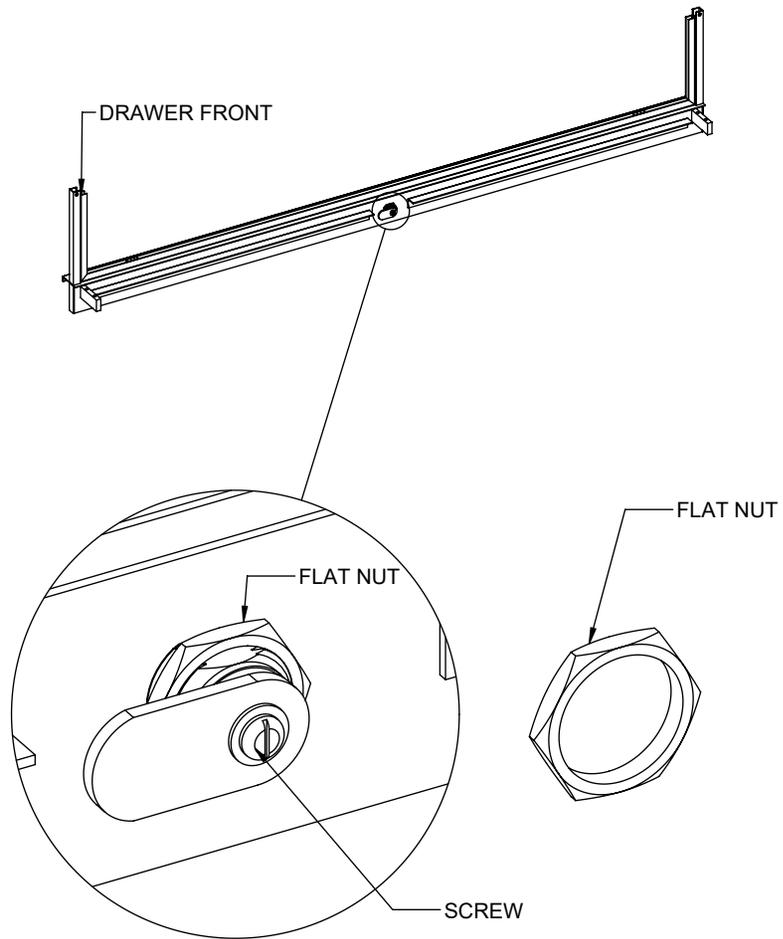

## 6B

SLIDE DRAWER FRAME ONTO DRAWER GLIDES (ON BASE FRAME).


MOUNT DRAWER FRONT TO DRAWER FRAME.



**4X**

1/4-20 X 0.5" L

FLAT HEAD HEXAGON SOCKET SCREWS  
(TO SECURE FRONT FRAME)

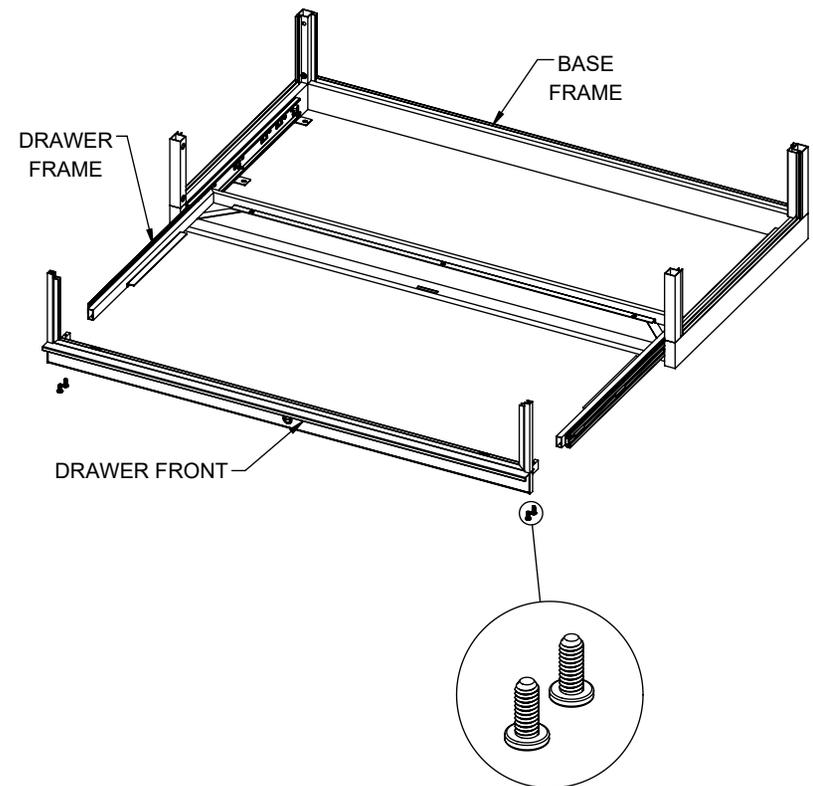


7


SLIDE FRONT GLASS PANEL INTO CHANNELS, AND MOUNT TOP CHANNEL.



**2X**  
#8-32 X 0.315" L  
SOCKET BUTTON HEAD SCREWS



TOP CHANNEL

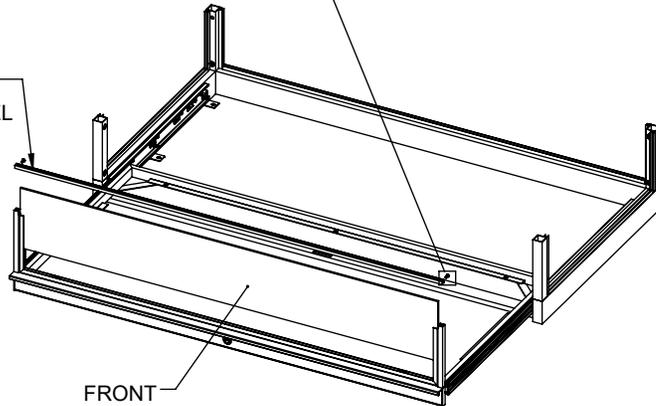


FRONT GLASS PANEL

8


PLACE DRAWER PANEL ONTO DRAWER FRAME, AND SCREW IT INTO PLACE USING (3) 1/4-20 X 1/2" L FLAT HEAD HEXAGON SOCKET SCREWS.

MAKE SURE THE NOTCH IS IN THE FRONT AND FACING TOWARDS THE BOTTOM.

**\*REMOVE THE DRAWER IF NECESSARY IN ORDER TO SCREW IN FROM BELOW\***




**3X**  
1/4-20 X 0.5" L  
FLAT HEAD HEXAGON  
SOCKET SCREWS

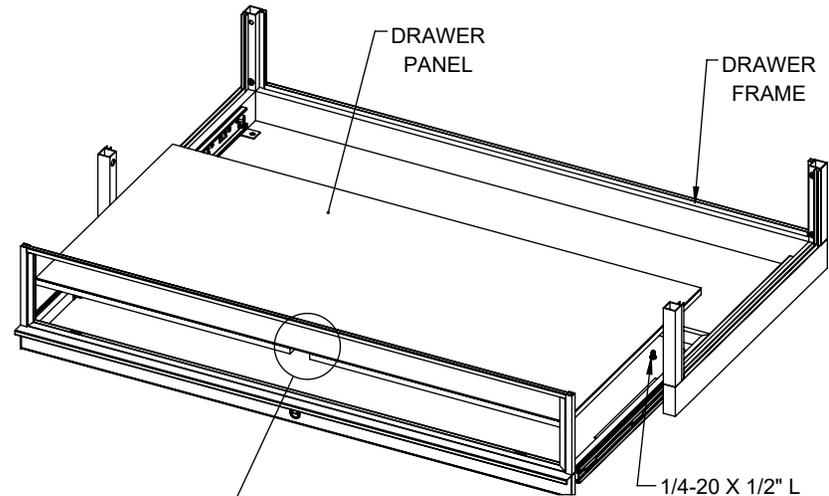

DRAWER PANEL

DRAWER FRAME


1/4-20 X 1/2" L  
FLAT HEAD  
HEXAGON  
SOCKET  
SCREWS



NOTCH DETAIL


# 9

SLIDE REAR AND SIDE GLASS PANELS INTO CHANNELS.

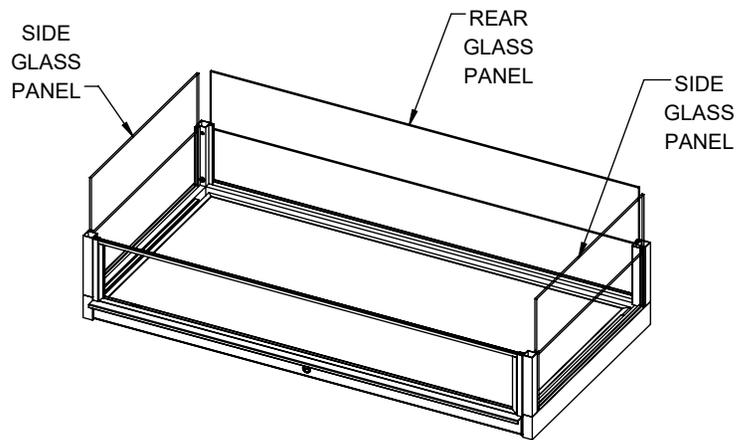


# 10


MOUNT TOP FRAME ONTO UPRIGHTS.



**2X**  
1/4-20 X 0.875" L  
SOCKET HEAD FLAT HEAD SCREWS  
(TO SECURE FRONT UPRIGHTS)




**2X**  
1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS  
(TO SECURE REAR UPRIGHTS)

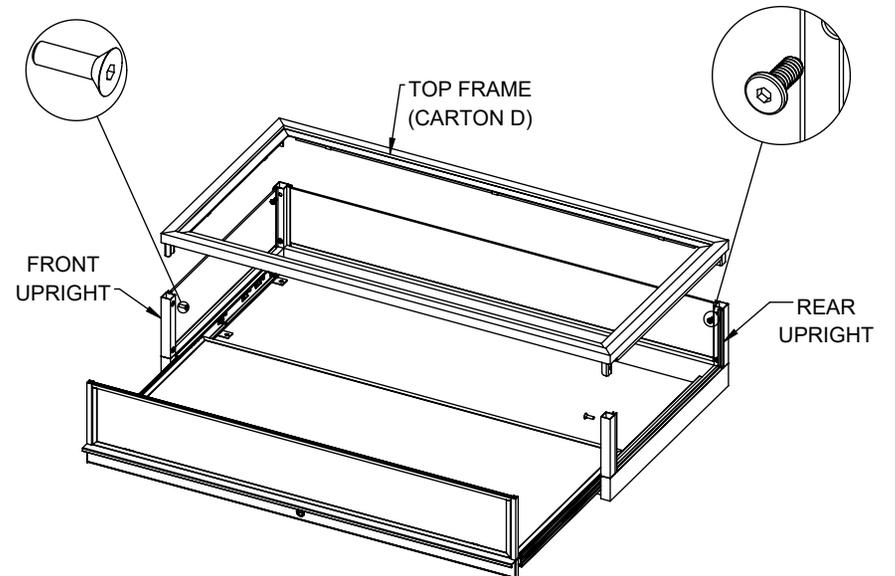

# 11


PEEL OFF CIRCULAR STICKERS  
ON TOP GLASS PANEL.

PLACE TOP GLASS PANEL ONTO  
TOP FRAME.

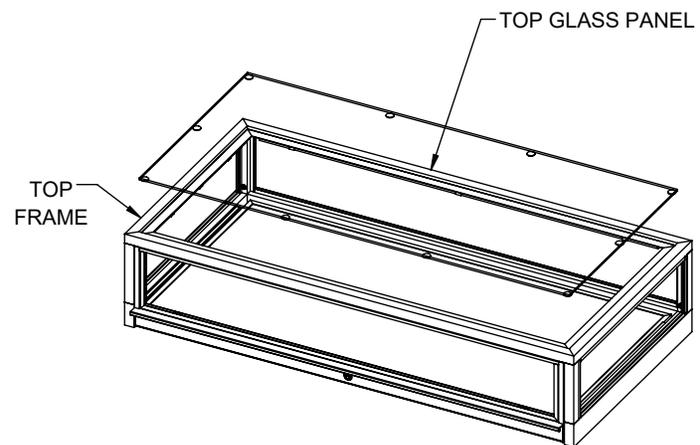

# 12


ON REAR CORNER, THERE IS A LOOSE  
LED CABLE. GUIDE IT THROUGH THE HOLE  
ON TOP OF THE WOOD TOP UNTIL THE  
LED CABLE COMES OUT ON THE BOTTOM.

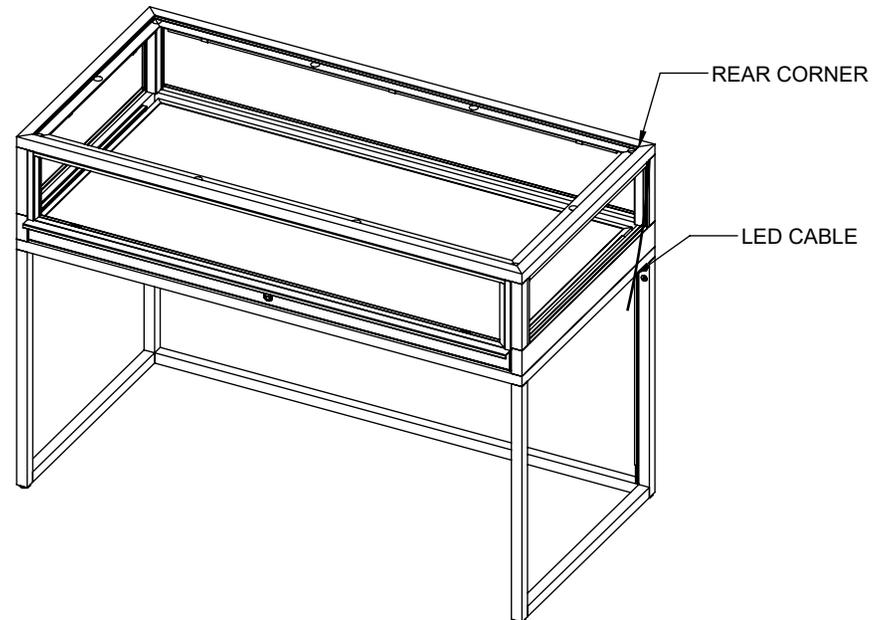


# 13

PULL OUT THE DRAWER.

CAREFULLY PLACE ELECTRICAL COVERS  
ONTO THE REAR UPRIGHTS. THE MAGNET  
WILL SNAP ONTO THE TUBING. IF IT  
SNAPS TOO QUICKLY, THE MAGNET MAY  
DAMAGE THE FINISH.

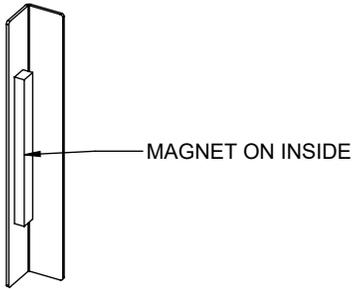

**2X**  
ELECTRICAL COVER

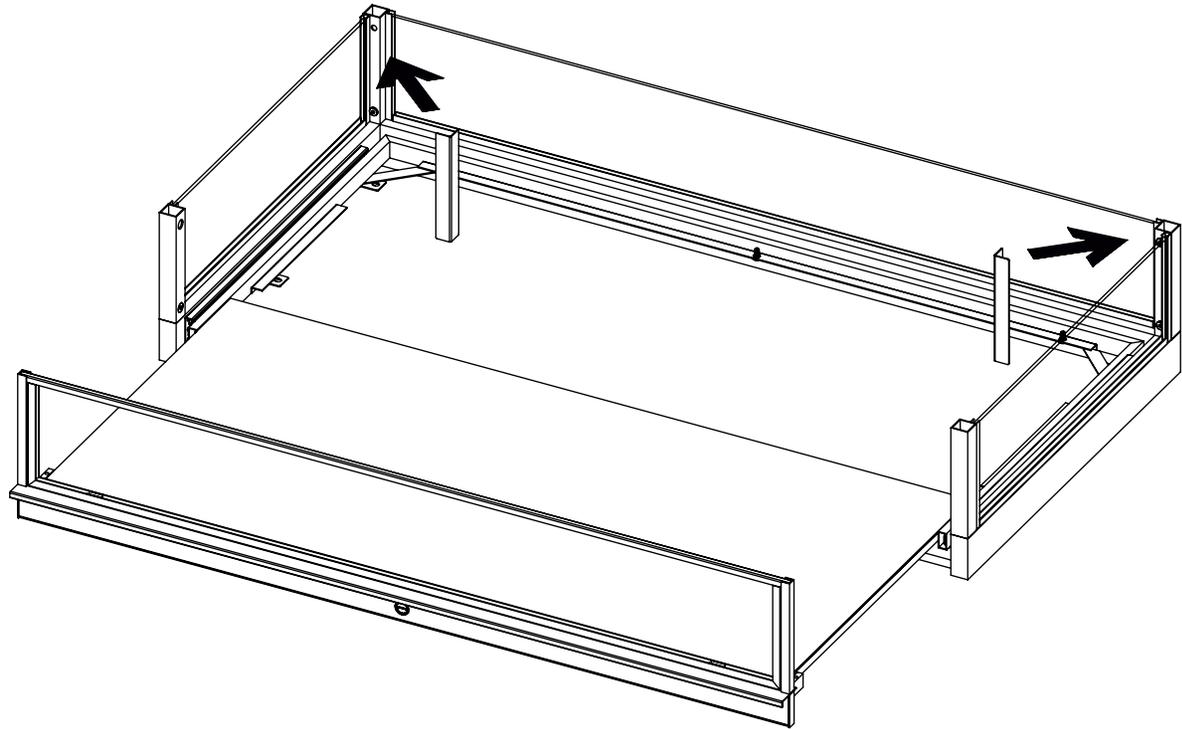


# ELECTRICAL INSTALLATION INSTRUCTIONS

**1**


INSTALL CABLE RACEWAY ON LEG.

**BACK VIEW**

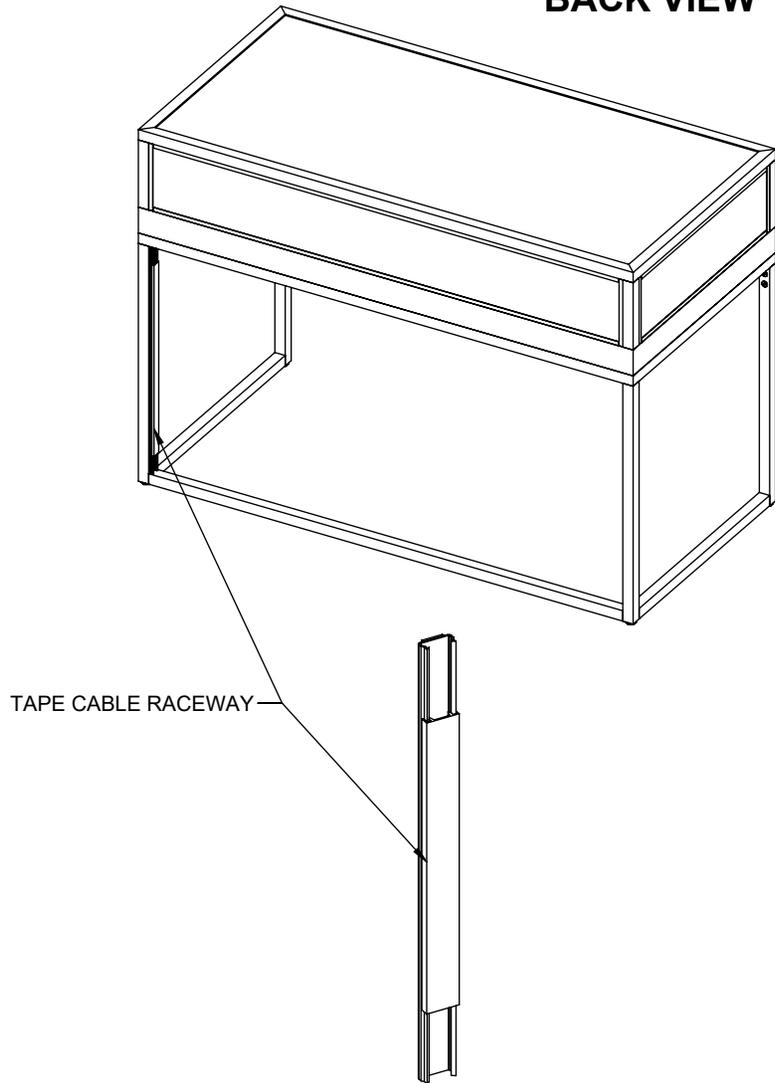

**2**


IF NOT ALREADY INSTALLED,  
INSERT THE OUTLET PLUG INTO  
THE POWER ADAPTER.

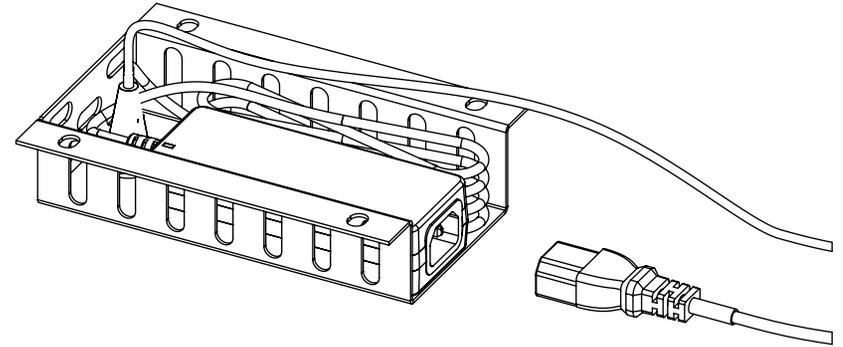


### 3

MOUNT BOTTOM MOUNTING BRACKET.


ASSURE THAT THE MOUNTING BRACKET  
FACES THE CORRECT DIRECTION. THE  
WIRE SHOULD COME OUT ON THE RIGHT  
SIDE.



**4X**  
1/4-20 X 0.5" L  
FLAT HEAD HEXAGON SOCKET SCREWS

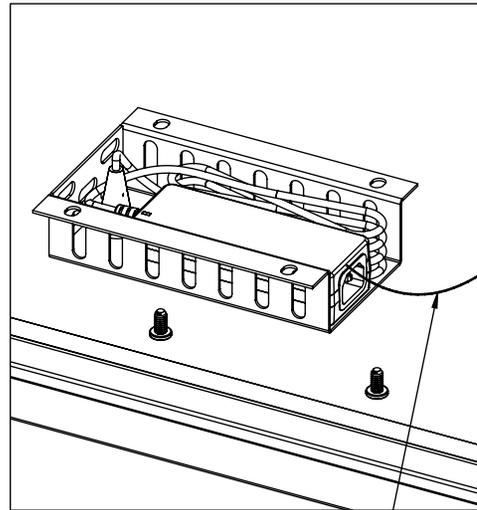



WIRE COMES  
OUT THIS SIDE

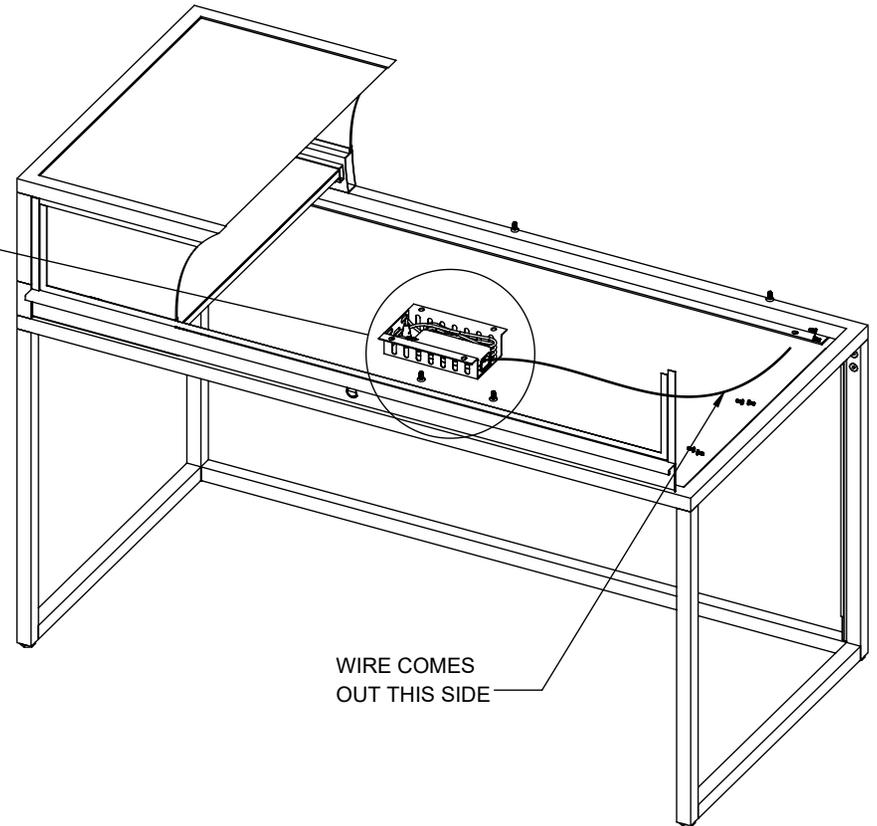

WIRE COMES  
OUT THIS SIDE

**4**

CONNECT THE PLUG FROM THE LED STRIPS AND THE PLUG FROM THE MOUNTING BRICK TOGETHER.

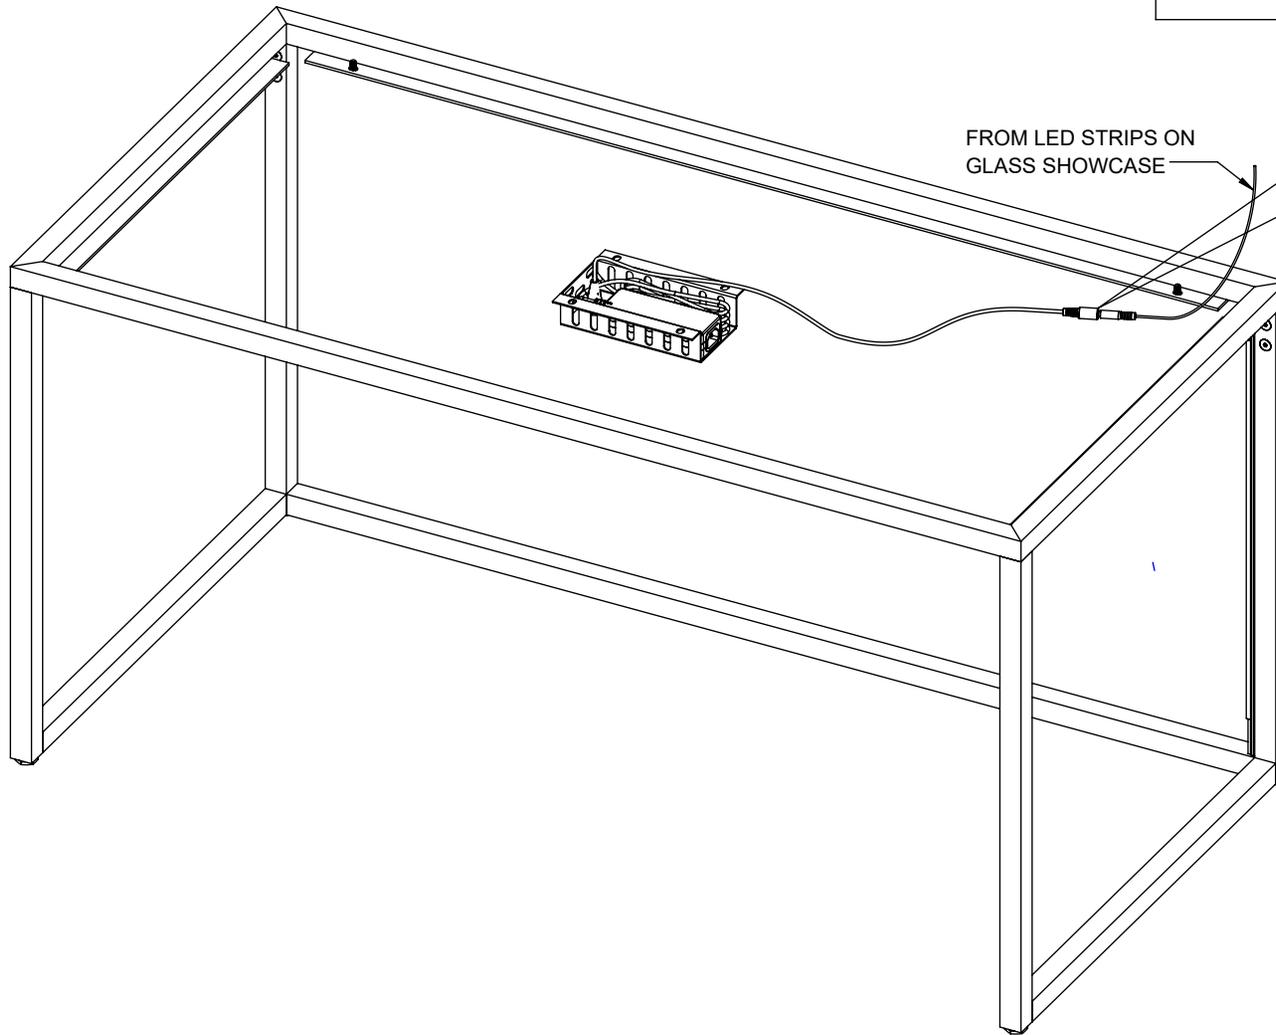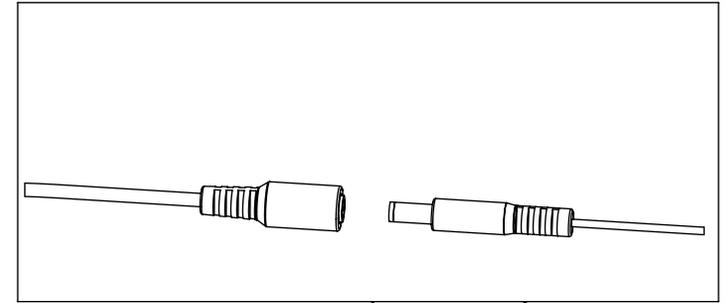


FROM LED STRIPS ON  
GLASS SHOWCASE

**5**

PUT THE POWER PLUG CABLE INTO THE WIRE MANAGEMENT EXTRUSION IN THE LEG.


**6**

SECURE WIRES FROM UNDERSIDE WITH INCLUDED ZIP-TIES. ZIP TIE LOCATIONS SHOWN FOR REFERENCE ONLY. INSTALLER TO DETERMINE BEST PLACEMENT.



**7**

TOGGLE THE SWITCH ON THE MOUNTING BRACKET TO TURN ON THE LIGHTS ON THE GLASS SHOWCASE.

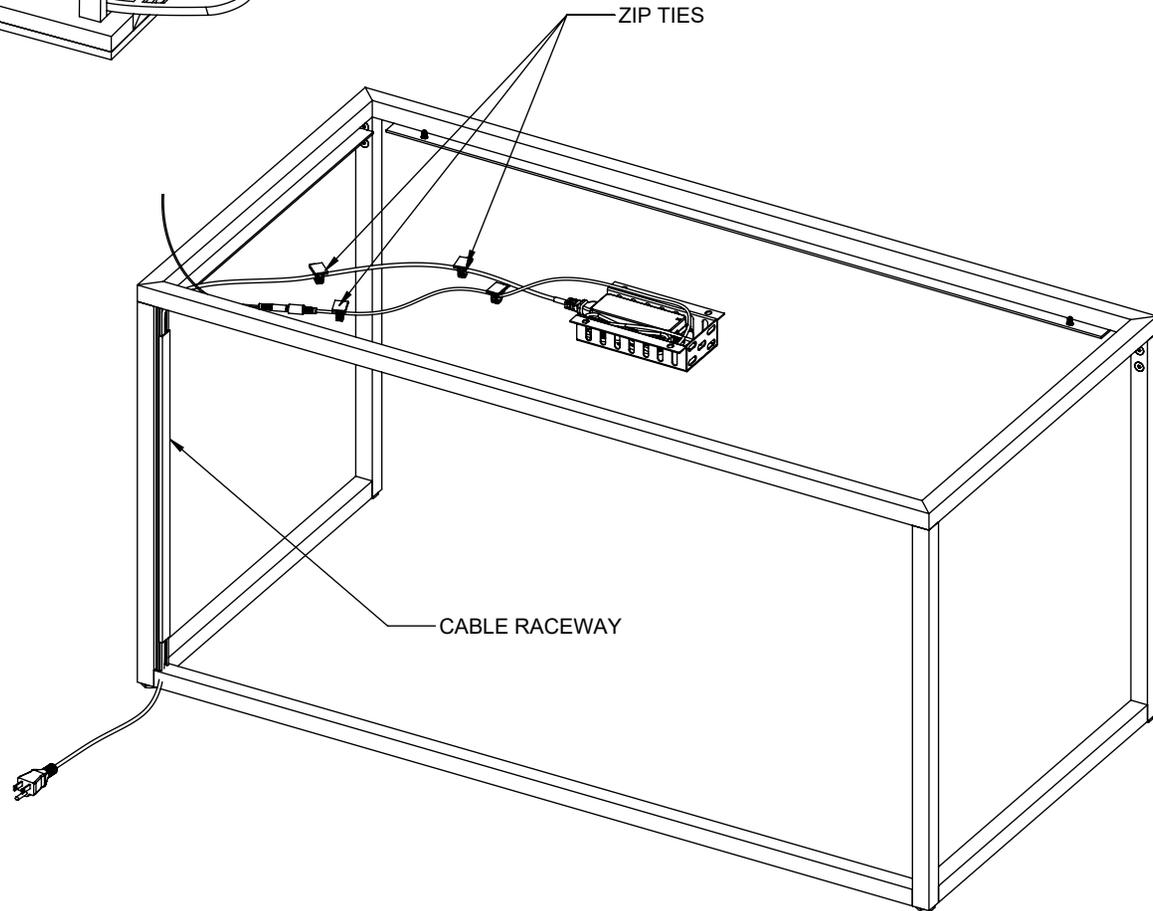

## TROUBLE SHOOTING INSTRUCTIONS

**1**

CHECK CONNECTION BETWEEN LED LIGHTS AND MOUNTING BRACKET (CONNECTION FROM [STEP 1.](#))

TRY TURNING ON LIGHTS AGAIN. IF LIGHTS DO NOT TURN ON, GO TO NEXT STEP.


**2**

CHECK CONNECTION BETWEEN MOUNTING BRICK AND POWER CORD (CONNECTION FROM [STEP 2.](#))

TRY TURNING ON LIGHTS AGAIN. IF LIGHTS DO NOT TURN ON, GO TO NEXT STEP.

**3**

UNMOUNT MOUNTING BRACKET.  
CUT ZIP TIE HOLDING BUNDLE OF WIRES TOGETHER.

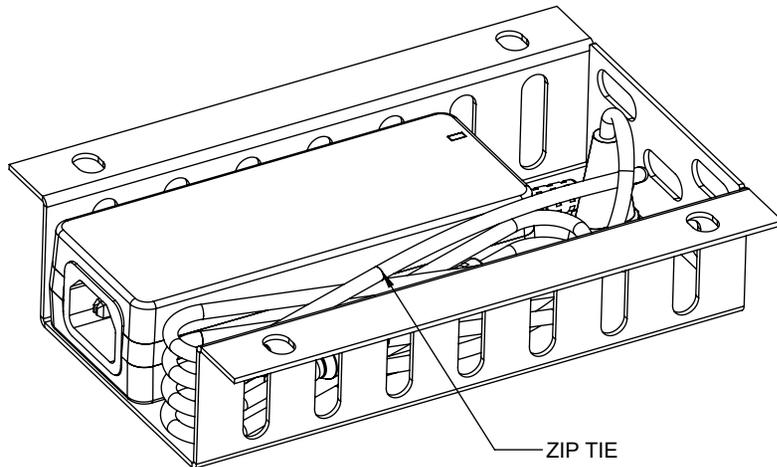

**4**

UNPLUG AND RECONNECT THE POWER ADAPTER TO THE SWITCH.

TRY TURNING ON LIGHTS AGAIN. IF LIGHTS DO NOT TURN ON, PLEASE CONTACT SUPPLIER FOR REPLACEMENT PARTS.

